

Zmena prístupových údajov D-COM DSL Router

Na zmenu prístupových údajov pre ADSL službu je potrebné sa prihlásiť do vášho zariadenia. Na vašom počítači si spustíte internetový prehliadač napr. Internet Explorer, Mozilla Firefox, Opera atď. Do adresného riadku internetového prehliadača zadajte ip adresa 192.168.1.1.

Na obrázku je znázornený a vyznačený adresný riadok v Internet Explorery.




Následne potvrdíte tlačítkom „ENTER“ na klávesnici.


Na obrazovke sa objaví okno prihlásenia k routru, kde je potrebné napísať prihlasovacie meno (Username) a heslo (Password) do zariadenia. Defaultne prihlasovacie meno: **admin** a heslo: **epicrouter**.



Po správnom zadaní sa Vám zobrazí stránka, vid'. nižšie:

Z možností na ľavej strane je potrebné kliknúť na ikonku s názvom **WAN**.

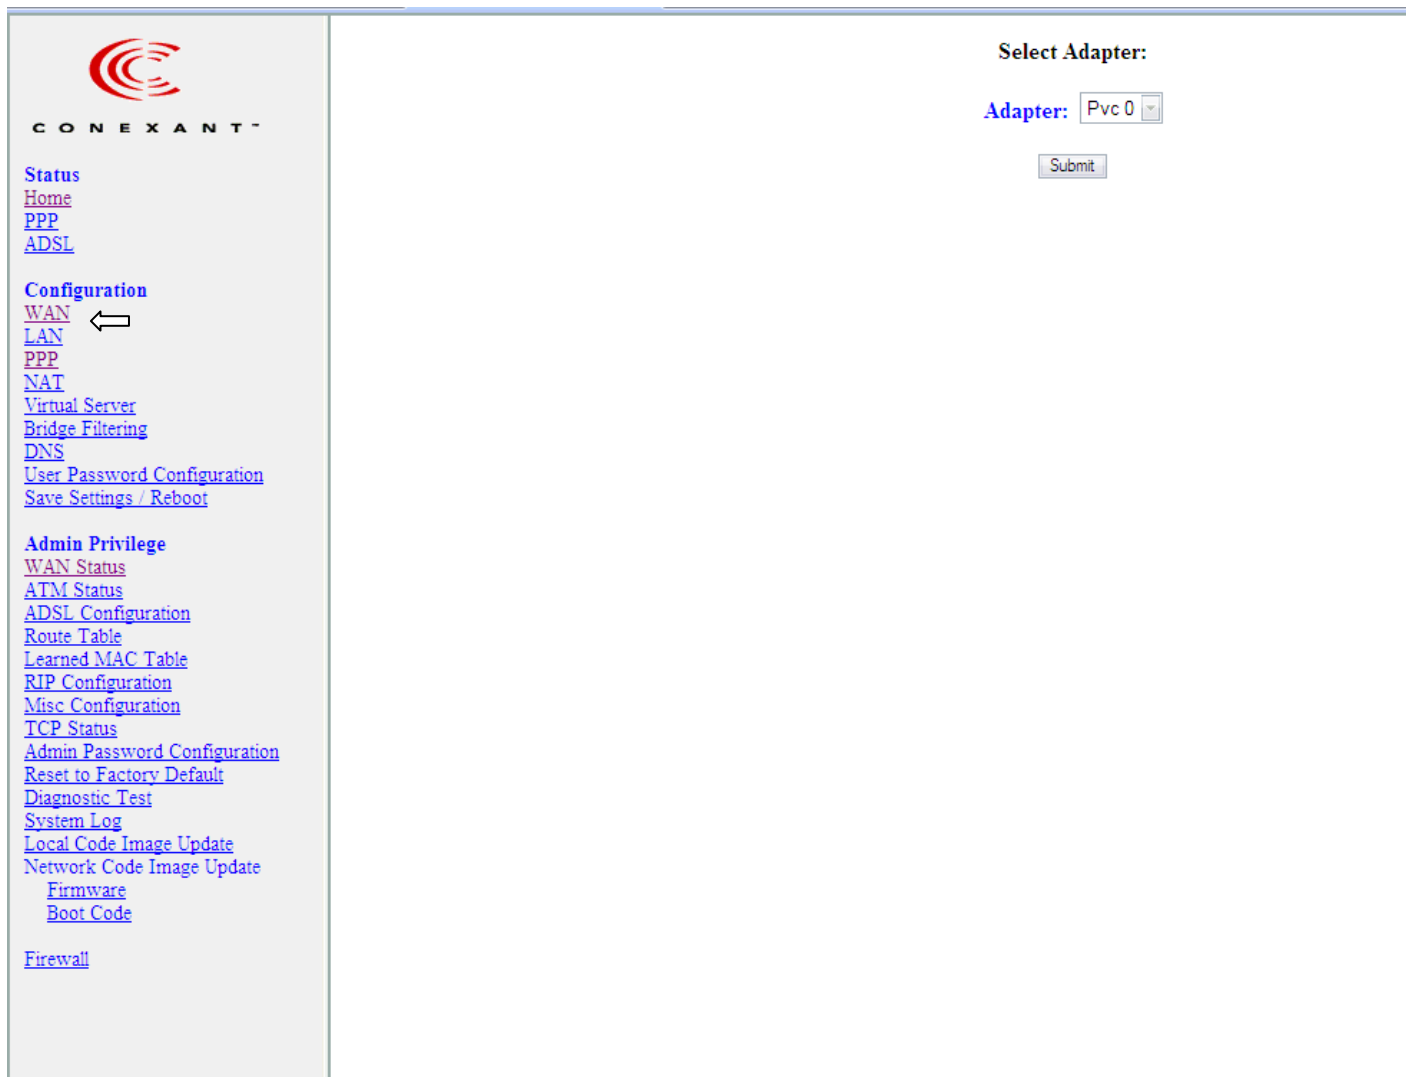


C O N E X A N T

Status
[Home](#)
[PPP](#)
[ADSL](#)

Configuration
[WAN](#) ←
[LAN](#)
[PPP](#)
[NAT](#)
[Virtual Server](#)
[Bridge Filtering](#)
[DNS](#)
[User Password Configuration](#)
[Save Settings / Reboot](#)

Admin Privilege
[WAN Status](#)
[ATM Status](#)
[ADSL Configuration](#)
[Route Table](#)
[Learned MAC Table](#)
[RIP Configuration](#)
[Misc Configuration](#)
[TCP Status](#)
[Admin Password Configuration](#)
[Reset to Factory Default](#)
[Diagnostic Test](#)
[System Log](#)
[Local Code Image Update](#)
[Network Code Image Update](#)
[Firmware](#)
[Boot Code](#)

[Firewall](#)

Select Adapter:

Adapter: Pvc 0

Po rozkliknutí ikonky WAN treba zmeniť prihlasovacie údaje na ADSL službu podľa informácií z e-mailu. Zmena prihlasovacieho mena a hesla sa robí v sekcii PPP. Prihlasovacie meno napíšete do riadku **Username** a heslo do riadku **Password**, uloženie zadaných zmien treba potvrdiť tlačidlom SUBMIT . Zmena sa prejaví do cca 30 sekúnd ak sa Vám podarilo všetko správne nastaviť.

WAN Configuration (Pvc 0)

Change Adapter

| | | | |
|-----------------------|-------------------|---|--|
| Virtual Circuit | Enabled | Static IP Settings | |
| Bridge | Disabled | IP Address | |
| IGMP | Disabled | Subnet Mask | |
| Encapsulation | PPPoE LLC | Gateway | |
| ATM | | PPP | Advanced PPP configuration |
| VPI | 0 | Service Name | |
| VCI | 35 | Username | |
| Service Category | UBR | Password | |
| Peak Cell Rate | 0 kbps | Disconnect Timeout | 0 minutes (Max:32767) |
| Sustainable Cell Rate | 0 kbps | PPP Disconnect Timer Config | |
| Max Burst Size | 0 | MRU | 1492 |
| DHCP Client | | MTU | 1492 |
| Enabled | | MSS | 1432 |
| Host Name | | Lcp Echo Interval | 10 seconds |
| MAC Spoofing | | Lcp Echo Maximum Consecutive Failure | 6 |
| Disabled | | Authentication | Auto |
| Mac Address | 00:00:00:00:00:00 | Automatic Reconnect | <input type="checkbox"/> |

Submit Reset

Settings need to be saved to Flash and the system needs to be rebooted for changes to take effect.

Pre vyskúšanie funkčnosti internetového pripojenia si zadajte do svojho internetového prehliadača napr. stránku našej spoločnosti www.swan.sk. V prípade ak načítavanie zlyhá, obráťte sa prosím na naše Odd. služieb zákazníkom.

Kontakt :

Odd. služieb zákazníkom

Tel.: +421-650-123 456

Fax: +421-2-35 000 799

E-mail: cc@swan.sk